

AMATEUR HOUR



IS OVER.

DryMAX XL PRO | XL LGR DEHUMIDIFIER

FEATURES



Extended handle can dolly and lock in AirMAX and Focus II air movers

Two-position handle for transport and stairs

Superior stacking for space savings (up to 3)



12" wheels for easy transport on stairs

Onboard USB for remote monitoring



Lockable cover to secure DryPHONE

'Push' button for handle extension




ADDITIONAL FEATURES, TECHNICAL SPECS AND ACCESSORIES

ADDITIONAL FEATURES

- ▶ Onboard USB to power DryPHONE for remote monitoring
- ▶ Built in Bluetooth - data logging of temperature relative humidity inlet and outlet
- ▶ Add two AA batteries for built-in connection to DryLINK Asset Manager (no tag needed)
- ▶ DryLINK enabled

Nesting for space savings

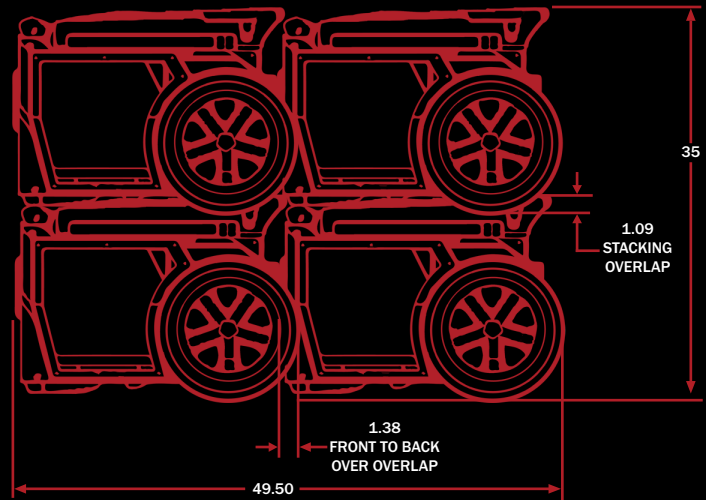

TECHNICAL SPECS

Part Number: 4043000 (Red)

Part Number: 4043060 (Blue)

Capacity: 140 Pints/Day @ 80F/60%RH

Current: 7.4 Amps

Airflow: 300 CFM

Cord Length: 25 ft.

Hose Length: 33 ft.

Operating Range: 33°F - 105°F

Size: 20"W x 18"H x 25.4"D, 85 lbs.

Xactimate Category: XL

Xactimate Code: WTRDHM>>

Rate/Day: \$114.72*

Warranty: 100% parts and labor for first year, 100% sealed refrigeration system for 2 - 5 years.

Xactimate Rates are for Madison, WI as of 12/12/23 and may differ by region.*

FILTERS

▶ **MERV-10 Filter**

Air filter, pleated, 55% efficiency up to 1.0 microns, 12" x 14" x 1"

ORDERING INFORMATION

55% MERV-10 Filter
Part Number: 4038558

DUCTING

▶ **14" Round Lay-Flat**

4 mil poly tubing duct, 14" x 250' roll

ORDERING INFORMATION

14" Round Lay-Flat Duct, 250'
Part Number: 4024936

Duct rings are included with unit.

Lay-Flat sold separately.



Scan this QR code to visit the DryMAX XL Pro webpage.

SCAN ME

Patents: thermastor.com/patents



PHOENIX



USEPHOENIX.COM | 800-533-7533